


NEO-RAY™



78

DIRECT

- Direct wall wash light distribution.
- The light is continuous and unbroken.
- T5 and T8 lamping.
- Staggered lamps.
- Die formed steel housing, nominal illuminated sections 3', 4', 6' and 8'.
- Runs are field adjustable.
- 90 degree mitered corners.
- Extruded aluminum ceiling trims.
- Selection of diffuser options.

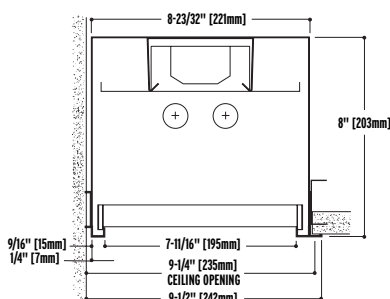

Construction

20-gauge steel housing.

Shielding

Parabolic or bold baffle.

Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish

Durable, low gloss, white, powder coated acrylic finish.

Staggered Lamps

T8=3", T5=6"

Mounting

Recessed.

ORDERING INFORMATION:

Sample number: 78-1T8-36-2EB-SI-S72

Series

78=Perimeter

Number of Lamps (not included)

1=1 Lamp 2=2 Lamps

Lamp Type

T8 T5 T5HO

* Staggered lighting strips?

Run Length

Overall Nominal Run Length__ft. (Any combination of 8', 6', 4' and 3' sections)

Voltage¹

1=120V 2=277V 3=347V U=Universal

Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast

Switching

SI=Single Switching DU=Dual Switching

Emergency

EM=Emergency Pack (Consult Factory)

Fusing

GLR GMF

Shielding

S72=White Bold Baffle


S79=Semi-specular Aluminum Parabolic Baffle

1 Due to various constraints, some options may not be combined with others.

2 T8 - 3" Staggered


T5 - 6" Staggered

STAGGERED LAMPS



RUNS AND PATTERNS

STANDARD ILLUMINATED SECTIONS MITERED CORNERS ARE INSTALLED CONTINUOUS AND UNBROKEN, AND ARE FIELD ADJUSTED

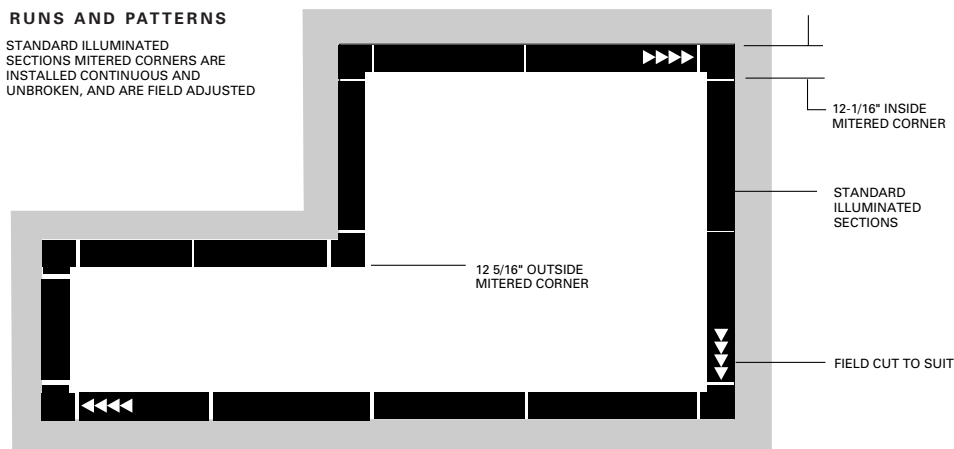

SHIELDING OPTIONS



S72 Bold Baffle



S79 Parabolic Baffle

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.